
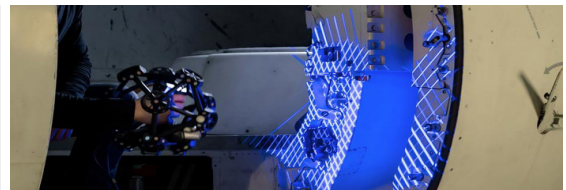



CREAFORM METRASCAN BLACK

THE METRASCAN 3D OPTICAL CMM SCANNER IS SYNONYMOUS WITH SPEED, ACCURACY AND VERSATILITY. AS THE PERFECT METROLOGY SOLUTION FOR QUALITY CONTROL, QUALITY ASSURANCE, INSPECTION AND REVERSE ENGINEERING APPLICATIONS.

- Metrology-grade measurements: accuracy of up to 0.035 mm (0.0014 in.)
- 7 Blue Laser Crosses, No Warm Up
- 800,000 measurements/second
- Scan any type of material, even black, multicolored and shiny surfaces



Creaform MetraSCAN Black		
ACCURACY		Up to 0.035 mm (0.0014in.)
VOLUMETRIC ACCURACY	9.1 m3 (320 ft3)	0.086 mm (0.0034 in.)
	16.6 m3 (586 ft3)	0.122 mm (0.0048 in.)
VOLUMETRIC ACCURACY WITH MAXSHOT 3D or C-LINK	MaxSHOT Next Elite	0.060 mm + 0.015 mm/m (0.0024 in + 0.00018 in/ft)
MEASUREMENT RESOLUTION		0.025 mm (0.0009 in.)
MESH RESOLUTION		0.100 mm (0.0039")
SCANNING AREA		310 x 350 mm (12.2 x 13.8 in.)
STAND-OFF DISTANCE		300 mm (11.8 in.)
DEPTH OF FIELD		250 mm (9.8 in.)
LIGHT SOURCE		7 blue laser crosses
LASER CLASS		2M (eye-safe)
MEASUREMENT RATE		800,000 measurements/s
WEIGHT		1.49 kg (3.28 lbs.)
DIMENSIONS (LxWxH)		289 x 235 x 296 mm (11.4 x 9.3 x 11.7 in.)
PART SIZE RANGE (recommended)		0.2–6 m (0.7–20 ft.)
SOFTWARE		VXelements
OPERATING TEMPERATURE RANGE		5–40°C (41–104°F)
OPERATING HUMIDITY RANGE (non-condensing)		10–90%
COMPATIBLE SOFTWARE	3D Systems (Geomagic® Solutions), InnovMetric Software (PolyWorks), Dassault (CATIA V5 and SolidWorks), PTC (Pro/ENGINEER), Siemens (NX and Solid Edge), Autodesk (Inventor, Alias, 3ds Max, Maya, Softimage).	
OUTPUT FORMATS	.dae, .fbx, .ma, .obj, .ply, .stl, .txt, .wrl, .x3d, .x3dz, .zpr	
(1) MetraSCAN BLACK and MetraSCAN BLACK Elite (ISO 17025 accredited): Based on VDI/VDE 2634 part 3 standard.	(2) MetraSCAN BLACK and MetraSCAN BLACK Elite (ISO 17025 accredited): Based on VDI/VDE 2634 part 3 standard. Sphere-spacing error is assessed with traceable length artefacts by measuring these at different locations and orientations within the working volume.	
(3) The volumetric accuracy performance of the system when using a MaxSHOT 3D cannot be superior to the default volumetric accuracy performance for a given model	(5) Also compatible with all major metrology, CAD, and computer graphic software through mesh and point cloud import	